

```

<HTML>
<!-- sample.html -- Example of html input file for Generic CGI Handling.
<!--
<!-- MANUFACTURING -- OPERATOR COUNT REQUEST FORM.      George Te, 11/21/2000
<!--
<HEAD><TITLE>HTML input file for Generic CGI Handling</TITLE></HEAD>
<BODY text="0000A0">
<FORM NAME= "sample" METHOD = "POST" ACTION="gencgib.cgi?sample"> 201
<BR><FONT SIZE=6> Manufacturing - Operator Count </FONT>
<HR><BR>
<TABLE BORDER CELLPADDING=5>
<TR>
<TD>User Id <BR><INPUT TYPE=text NAME="user" SIZE=15 value=$userid ></TD>
<TD>Factory <BR><INPUT TYPE=text NAME="fact" SIZE=15 value="0" ></TD>
<TD COLSPAN=2>Current Plan ID<br>
<SELECT NAME="plan">
<OPTION VALUE="planA1" SELECTED > Plan-A
<OPTION VALUE="planD1">T1 Plan-T
<OPTION VALUE="planE1">U1 Plan-E
<OPTION VALUE="planF1">V1 Plan F
<SELECT> </TD></TR>
<TR>
<TD>Product ID <BR><INPUT TYPE=text NAME="prod" SIZE=15 value="ALL" >
<TD>Station <BR><INPUT TYPE=text NAME="stan" SIZE=15 value="ALL" >
<TD>Machine <BR><INPUT TYPE=text NAME="mach" SIZE=15 value="ALL" >
<TD>Categories <BR><INPUT TYPE=text NAME="catg" SIZE=15 value=""
<TD>Center <BR><INPUT TYPE=text NAME="cent" SIZE=15 value=""
<TD>Processes <BR><INPUT TYPE=text NAME="procs" SIZE=15 value="ALL"
</TABLE><BR>

```

```

<HR>
  Operators: (Please select one) <BR>
  <INPUT TYPE="Radio" Name="actn value="a1 Operator Demand      ">1. Run Operator count at demand <BR>
  <INPUT TYPE="Radio" Name="actn value="a2 Oper_Starts" CHECKED  >2. Run Operator count at Starts <BR>
<BR>
  <INPUT TYPE=submit NAME="submitButton" VALUE="Submit"> ~~~~~ 203
  <INPUT TYPE=reset NAME="resetbutton" VALUE="Reset">
</FORM>

<SCRIPT language = JavaScript >
  <!--
    document.sample.fact.focus();
  -->
</SCRIPT>
  <!-- EMAIL_SEND:Y      (N-Don't send; Y- send per EMAIL_RECEIVER.) -->
  <!--
  <!-- EMAIL_RECEIVER:   te@us.ibm.com
  <!-- EMAIL_RECEIVER:   gte@vnet.ibm.com
  <!-- PROGRAM:   /afs/fishkill/data/fac/pqr/mmm555/countopr.exec
  <!--
  <!-- =====
  <!-- KEYS:
  <!-- 1. email_send -- to send results to recipients or not.
  <!-- 2. email_receiver -- email addresses of receivers of output files.
  <!-- 3. program -- programs that gencgib.cgi will call. If 2nd
  <!-- word is '&', then execute detached. 'NO&' or blank
  <!-- means execute at called point. Calling program waits
  <!-- for results.
  <!--
  <!-- =====
</body> </html>

```

FIG. 2 (continued)

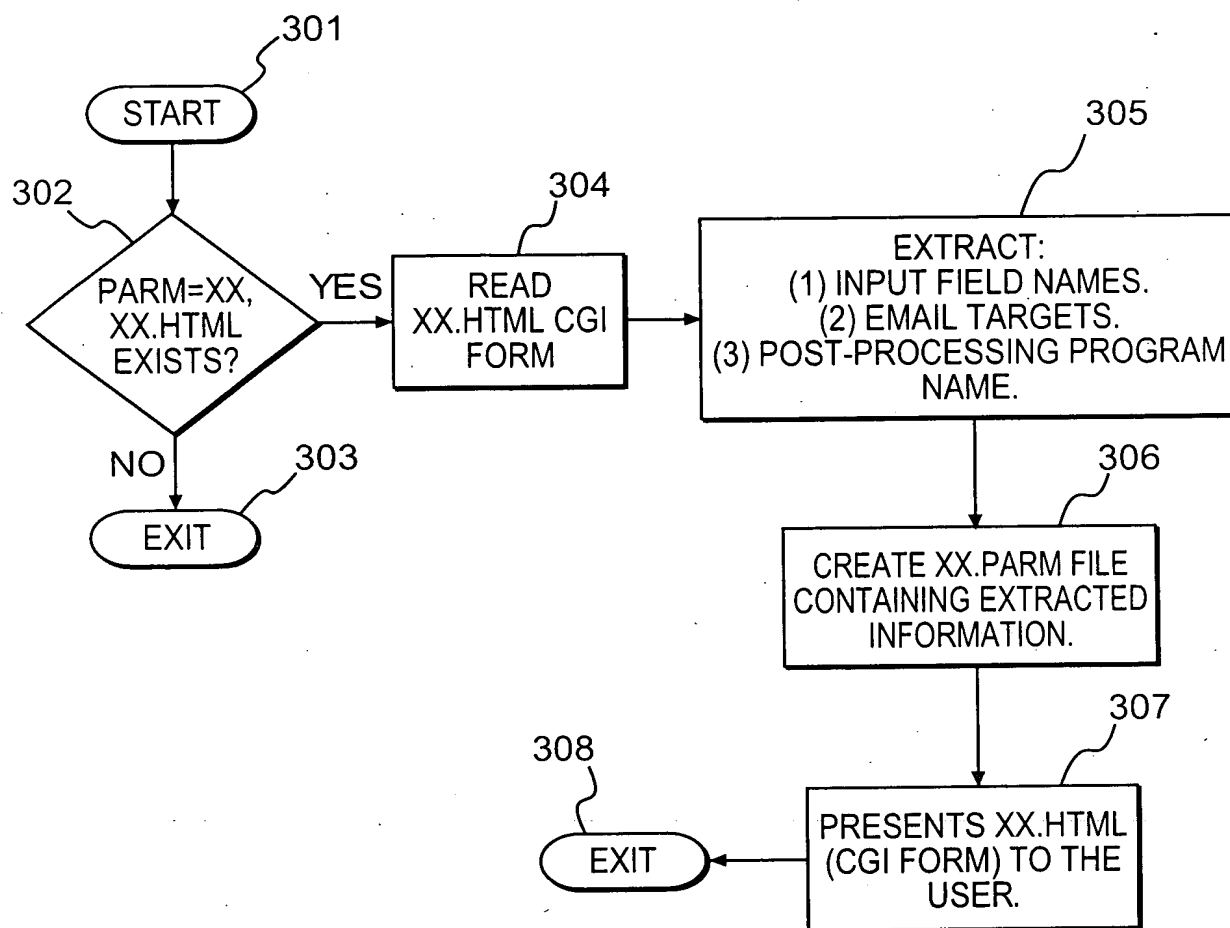


FIG. 3

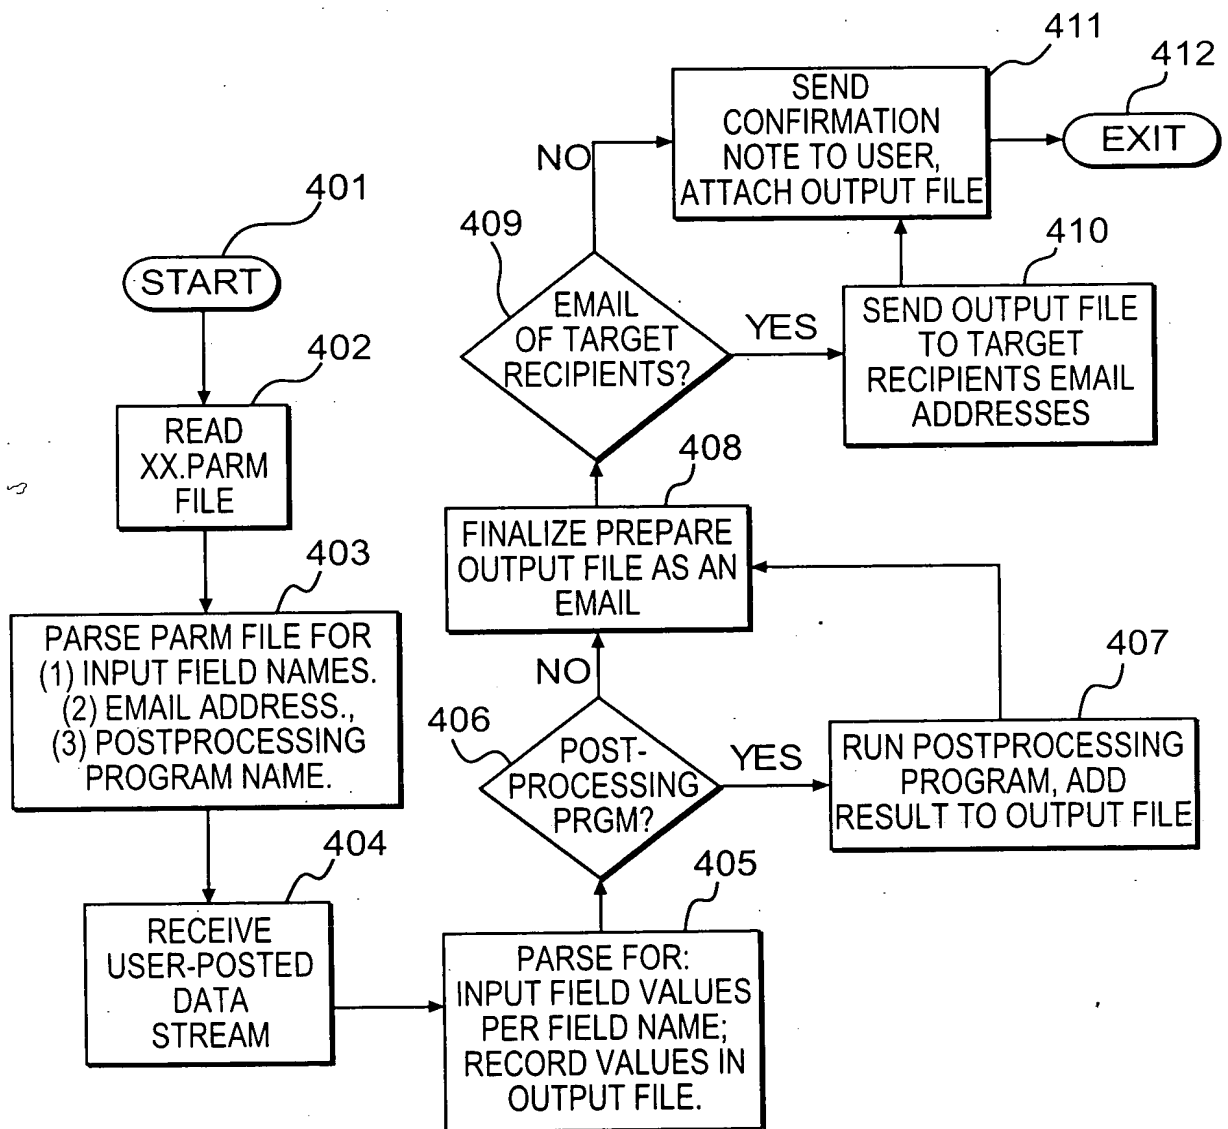


FIG. 4

FIG. 5

SAMPLE.HTML INPUT SCREEN

☐ HTML INPUT FILE FOR GENERIC CG HANDLING - NETSCAPE

File Edit View Go Communicator Help

Bookmarks Netsite <http://ic.fishkill.ibm.com/cgi433/gt00002.cgi?sample.html> What's Related

Back Forward Reload Home Search Netscape Print Security Stop

MANUFACTURING - OPERATOR COUNT

USER ID JFURBANK	FACTORY K15	CURRENT PLAN ID T1 PLAN-T
PRODUCT ID 2055pp	STATION 1-THRU-45	MACHINE ALL
CATEGORIES 55pp	CENTER K15-A	PROCESSES ALL

OPERATORS: (PLEASE SELECT ONE)

☐ 1. RUN OPERATOR COUNT AT DEMAND
☒ 2. RUN OPERATOR COUNT AT STARTS

SUBMIT

RESET

Document: Done

Start VP Buddy Session A- Session B- Session C- Session D- Session E- Excel - 2:28 PM


Yahoo!-N.. GEORGE T Freeland.. HTML:inp.. MS Command- MS Command-

501

502

FIG. 6

CONFIRMATION RESPONSE TO THE USER.

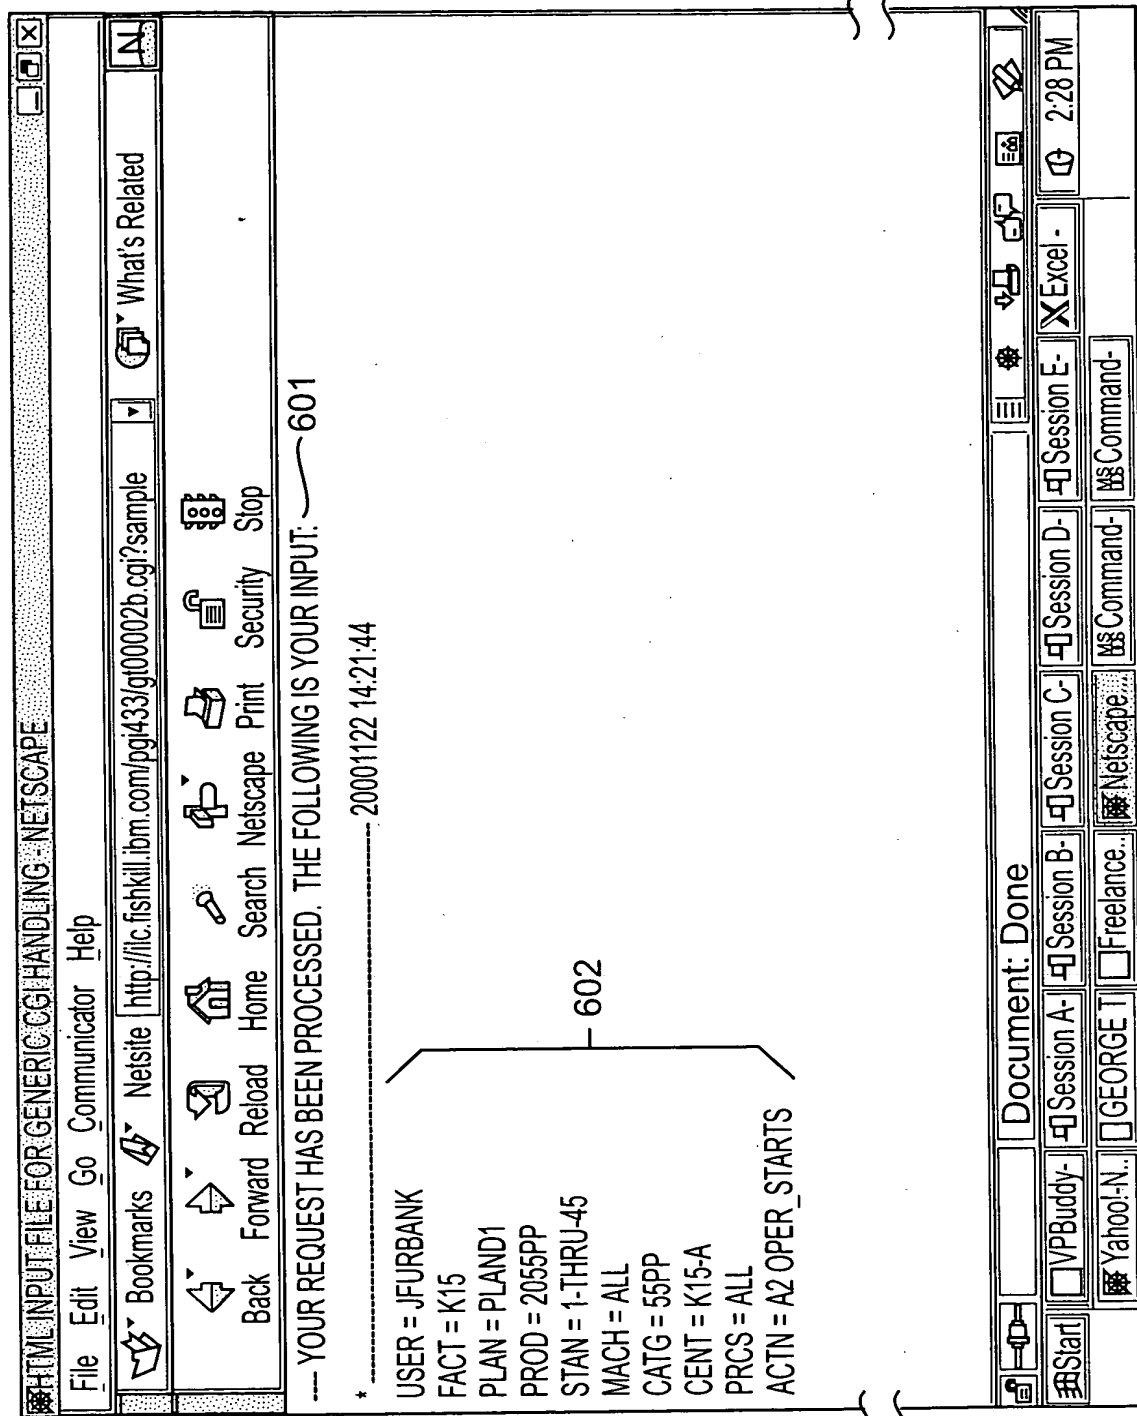

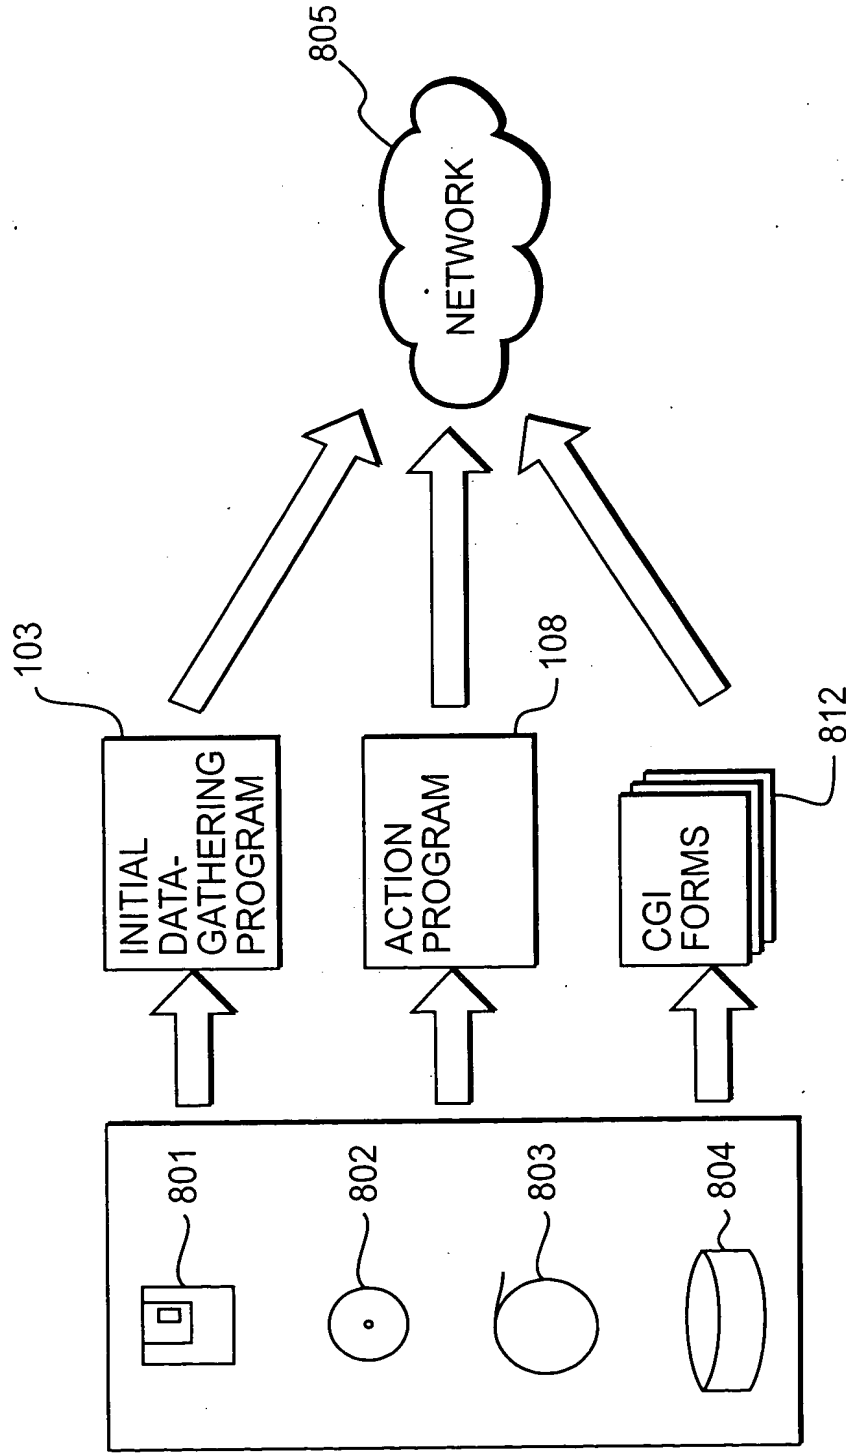


FIG. 8